



## NORDIC CCM0530 SERIES

MODULAR CUBED ICE MAKER



Ice maker shown on B530SS bin

### FEATURES:

- Produces up to 600 lbs. (273 Kgs.) of ice per day
- Constructed from corrosion-resistant stainless steel
- Built in Agion Antimicrobial product protection effective against mold, mildew and fungus
- Ultra-low profile – only 20 inches (508 mm) tall
- Harvest assist reduces utility consumption
- Choice of full or half cube size
- No air filter to clean or replace




Protected by Agion



## OPERATING LIMITS

|  |  |
|--|--|
| Ambient Temp. Range Air & Water              | 50° - 110°F (10° - 43°C)                       |
| Water Temp. Range                            | 40° - 100°F (4.5° - 38°C)                      |
| Water Pressure Ice Maker Water in            | Min. 20 psi (1.4 bar)<br>Max. 60 psi (4.1 bar) |
| Condenser Inlet Water<br>(Water cooled only) | Min. 20 psi (1.4 bar)<br>Max. 60 psi (4.1 bar) |

## Dimensions and Air Flow

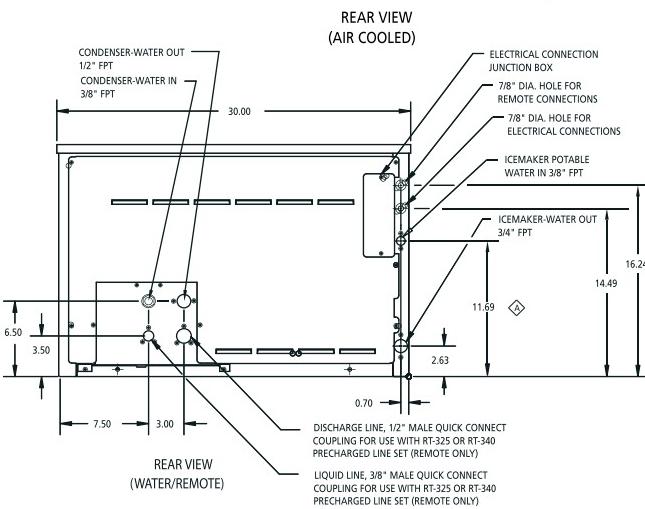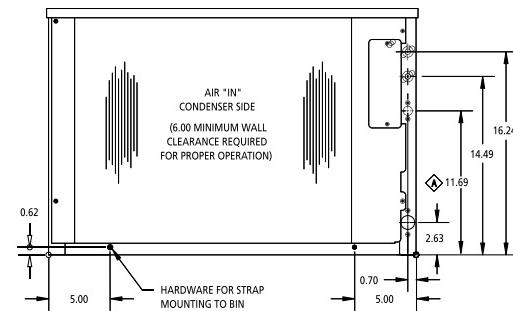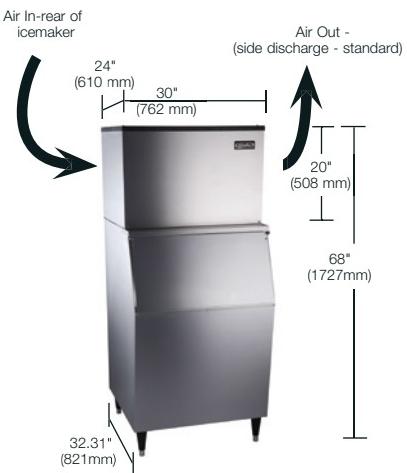


| MODEL NO.         | Cond.<br>Unit | Ice Prod.<br>per 24 hrs.<br>at 70° Air /<br>50° Water<br>lbs. (Kgs.) | Ice Prod.<br>per 24 hrs.<br>at 90° Air /<br>70° Water<br>lbs. (Kgs.) | Water Used-Gals.<br>(Ltrs.) per 100 lbs. of<br>ice 90° Air / 70° Water |              | Kilowatts<br>Used per<br>100 lbs.<br>of ice 90°<br>Air / 70°<br>Water | Heat<br>Rejection<br>(Btuh) | Electrical<br>Rating | Min.<br>Circuit<br>Amp. |
|-------------------|---------------|--|--|--|--------------|---|-----------------------------|----------------------|-------------------------|
|                   |               |  |  | Ice Prod.<br>Use   | Cond.<br>Use |   |                             |                      |                         |
| <b>CCM0530A*1</b> | Air           | 600 (273)  | 458 (208)  | 24.0   | n/a          | 6.2   | 9835                        | 115/60/1             | 19.1                    |
| <b>CCM0530W*1</b> | Water         | 596 (271)  | 513 (233)  | 24.2   | n/a          | 4.9   | 9777                        | 115/60/1             | 14.3                    |
| <b>CCM0530R*1</b> | Remote        | 567 (258)  | 455 (207)  | 28.2   | n/a          | 6.8   | 10278                       | 115/60/1             | 14.9                    |

| MODEL NO.      | Description  | Shipping Weight lbs. (Kgs.) |
|----------------|--|-----------------------------|
| <b>RC05001</b> | Remote Condenser for 1 or 2 model CCM0530R (115/50-60/1 voltage) | 95 (43)                     |
| <b>RT25</b>    | 25 ft. (7.6m) Precharged Tubing Kit for R-404A models            | 13 (6)                      |
| <b>RT40</b>    | 40 ft. (12m) Precharged Tubing Kit for R-404A models             | 18 (8)                      |
| <b>RT60</b>    | 60 ft. (18.2m) Precharged Tubing Kit for R-404A models           | 26 (12)                     |

See Bin specification sheet for information on storage bins

\* Represents cube size. For full cube substitute an "F", for half cube substitute an "H".



NUMBER OF WIRES..... 3

FUSE SIZE..... 20

SHIPPING WEIGHT LBS (KGS.) .. 170 (77)

AGENCY LISTINGS.....



| Cube Size: | Width       | Depth       | Heighth     |
|------------|-------------|-------------|-------------|
| Full       | 7/8" (22mm) | 7/8" (22mm) | 7/8" (22mm) |
| Half       | 3/8" (10mm) | 7/8" (22mm) | 7/8" (22mm) |



Cornelius

© 2009 IMI CORNELIUS

IN THE U.S.A.

Ph: 800.238.3600  
Fax: 763.488.4283

OUTSIDE THE U.S.A.

Ph: 763.488.8200  
Fax: 763.488.4283

101 Broadway Street West

Osseo, MN 55369  
[www.cornelius.com](http://www.cornelius.com)

For more information or to place an order, contact your sales representative or authorized distributor.